

COMMERCIAL
CONTROL
VALVES

Performa™ Cv Control Valves

Pentair Water® offers a full range of Autotrol™ Control Valves to meet a wide range of water conditioning applications.

For more information, call
742 Tich or visit www.pentair.com






Dimensions

Valve Connections

Tank Thread	2-1/2-inches – 8, male
Inlet/Outlet Threads	1-3/4-inches – 12 UNC-2A male
Drain Line	3/4-inch NPT, male
Brine Line	3/8-inch NPT, male
Distributor Tube Diameter	1.050 inches (27 mm)
Distributor Tube Length	1/2 ± 1/2-inches (13 ± 13 mm) above top of tank

Outline Dimensions

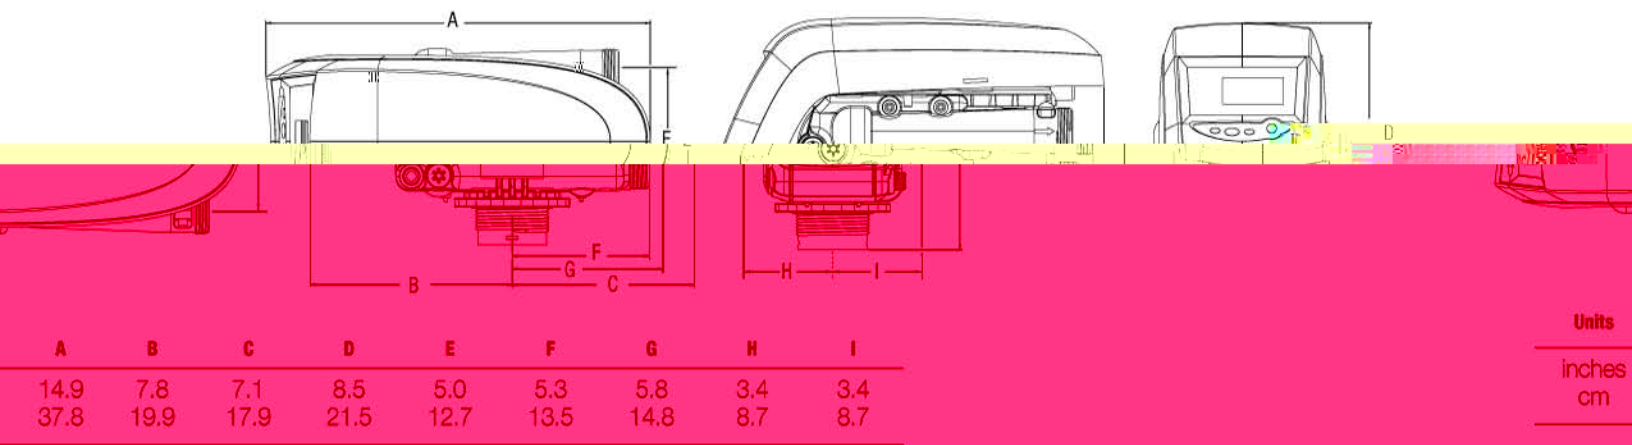

Performance

Flow Rates (Valve On Service)

Fuller Flow Rate Characteristics

Backwash Flow Control Table


Logix® Series Control




Injector* Performance

Logix™ Series Controllers


Injector "H" (Light Purple)
For 9-inch Tanks

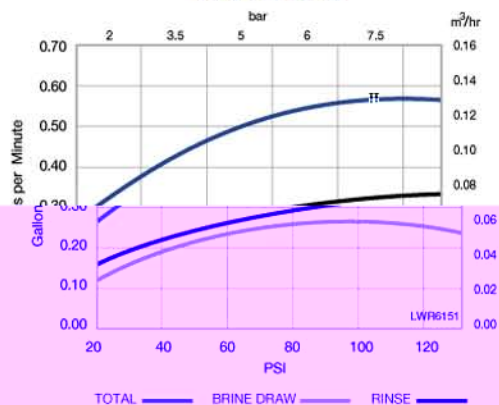


Injector "J" (Light Blue)
For 10-inch Tanks

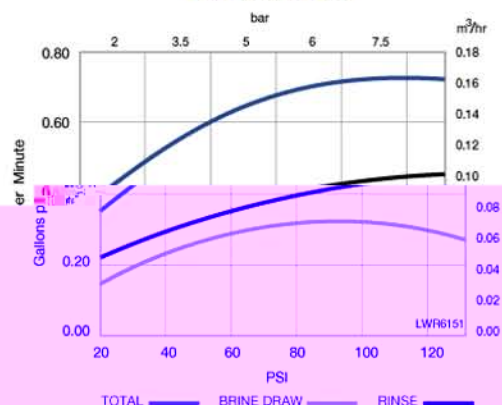


Injector "K" (Pink)
For 12-inch Tanks

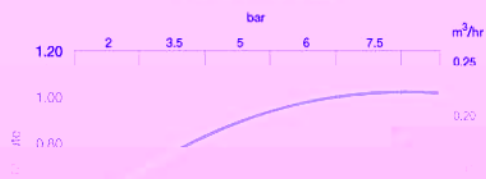

Injector "L" (Orange)
For 13- and 14-inch Tanks

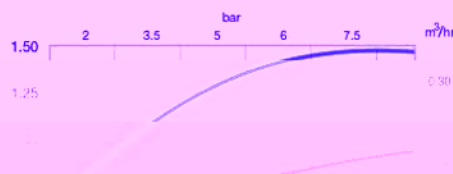

Injector "N" (Green)
For 16-inch Tanks

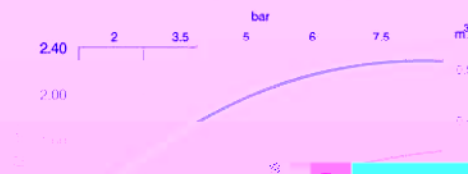

13 14

11

11 12

